



Sliding belt conveyors

For gentle and dust-free transport of bulk materials in the wood industry

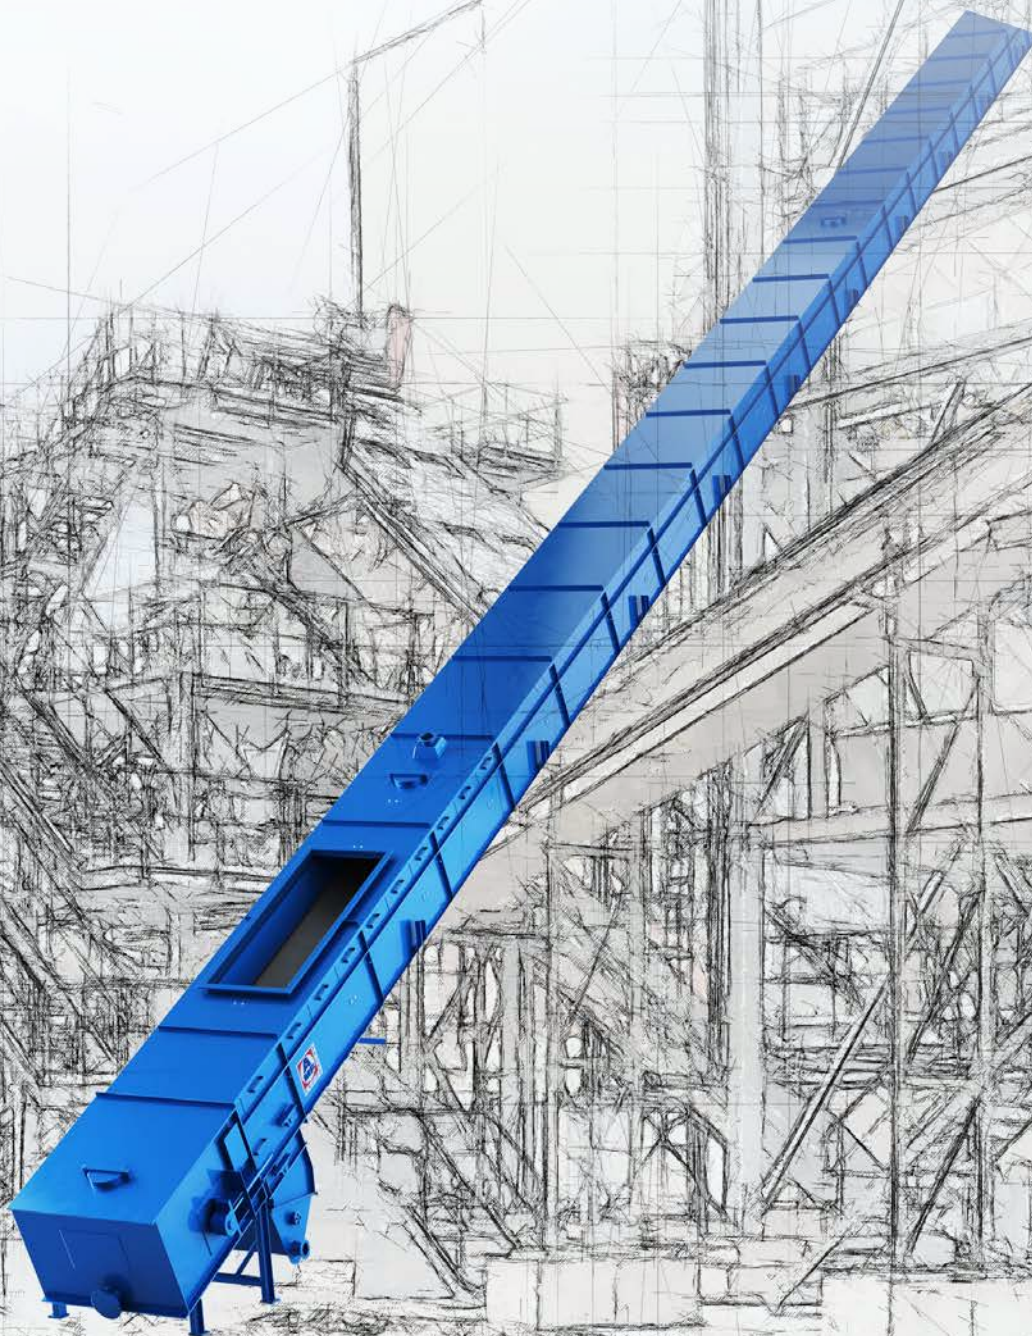

CONVEYORS
INDUSTRIAL SOLUTIONS

www.amf-bruns.com

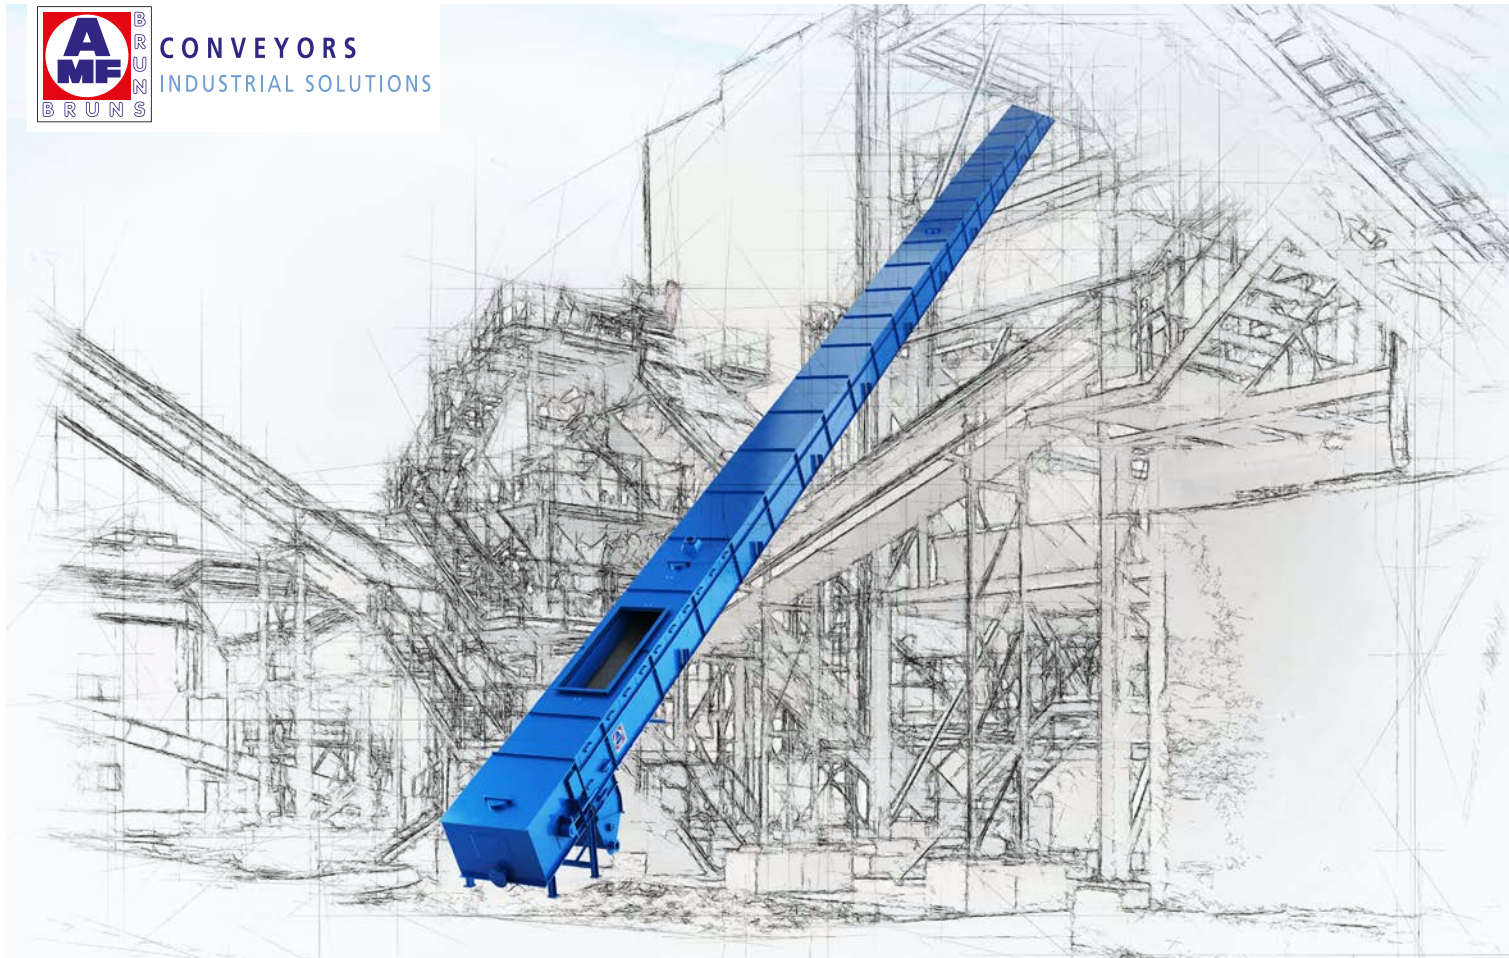

Sliding belt conveyors

GGF 500 to GGF 1600

Technical data

Sizes:	from 500 mm to 1,600 mm belt width
Conveyor lengths:	from 10 m to 40 m
Conveying power:	200 m ³ to 1,300 m ³ /h (plus 25% reserve)
Conveying speed:	1 to 1.7 m/s
Other:	Base with plastic coating for return / elevation of the system from 0° to 10° without studded belt / elevation of the system from 11° to 25° with studded belt / use of sliding belts / split plummer block housings with roller bearings
Additional options:	ATEX design

GGF sliding belt conveyors from AMF-Bruns


For transport that's easy on the product

Typical products conveyed:

glued shavings, MDF fibres, shavings, wood chips, sawdust, wood recycling, OSB, bark

Conveying speeds:

up to 1.7 m/s

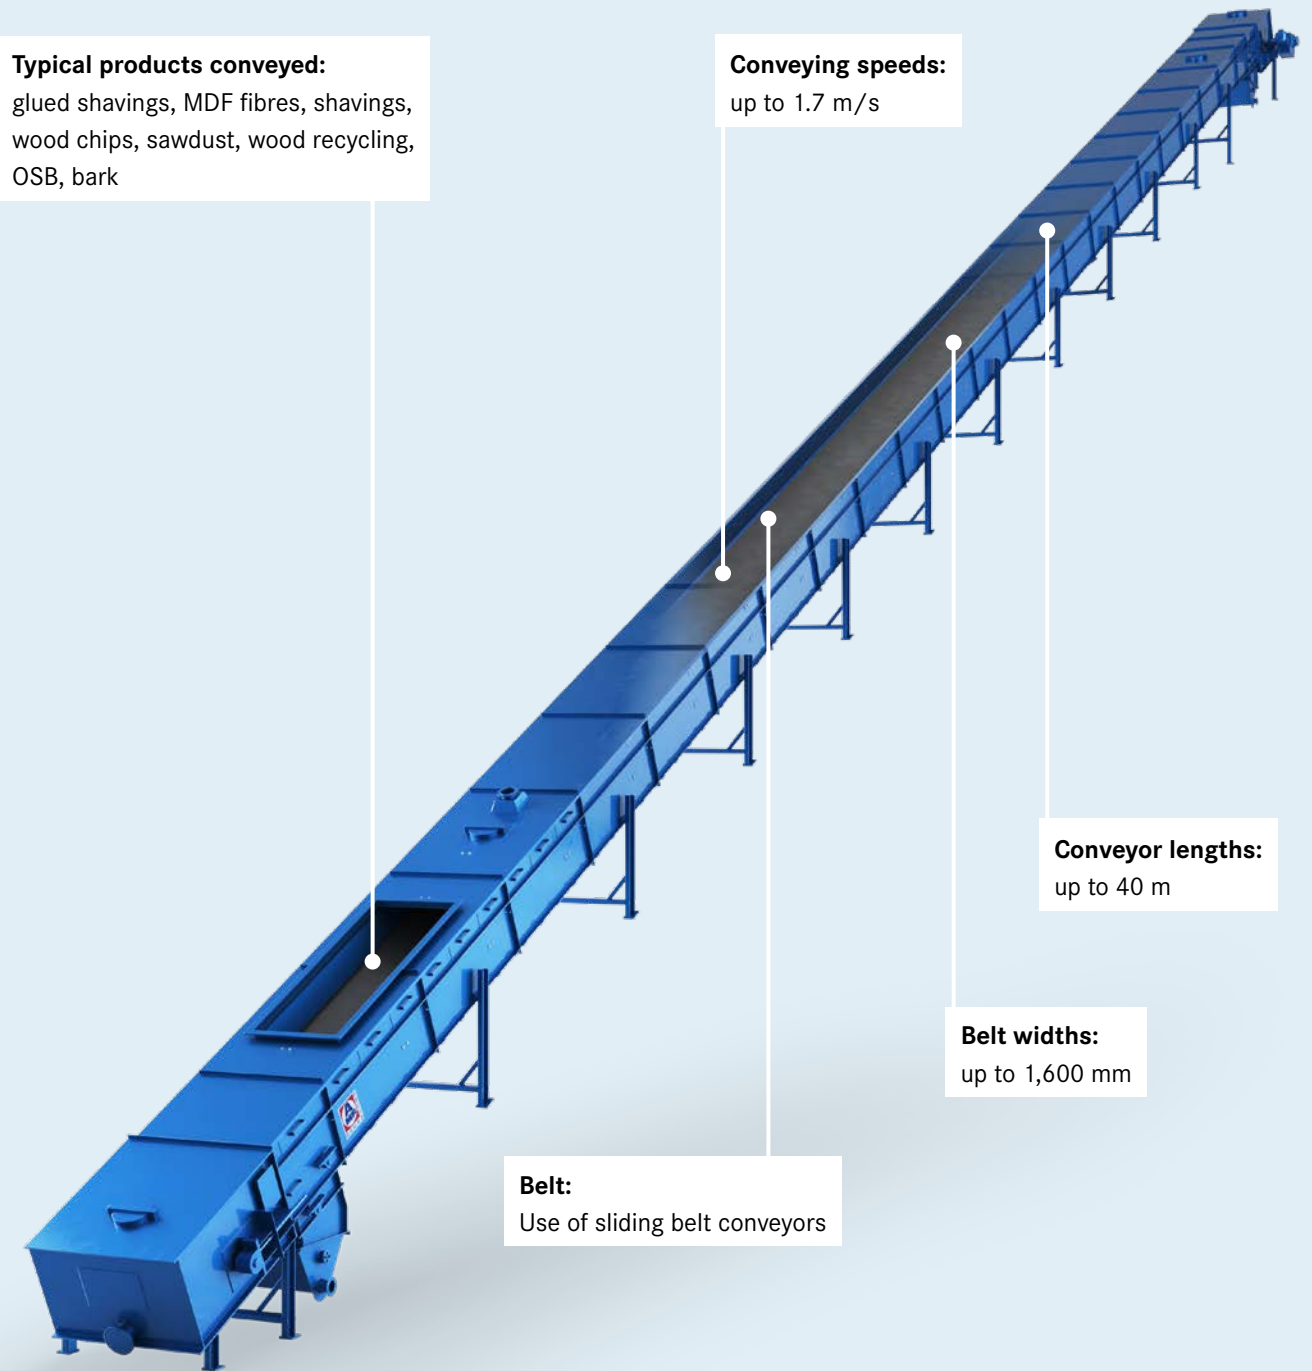

Conveyor lengths:

up to 40 m

Belt widths:


up to 1,600 mm

Belt:

Use of sliding belt conveyors

The benefits of AMF-Bruns sliding belts:

- dust-free and low-noise operation
- low maintenance costs
- belt protection thanks to optimized troughing
- optional ATEX design
- no platforms necessary
- foldable floors for easy cleaning
- optional reversible design

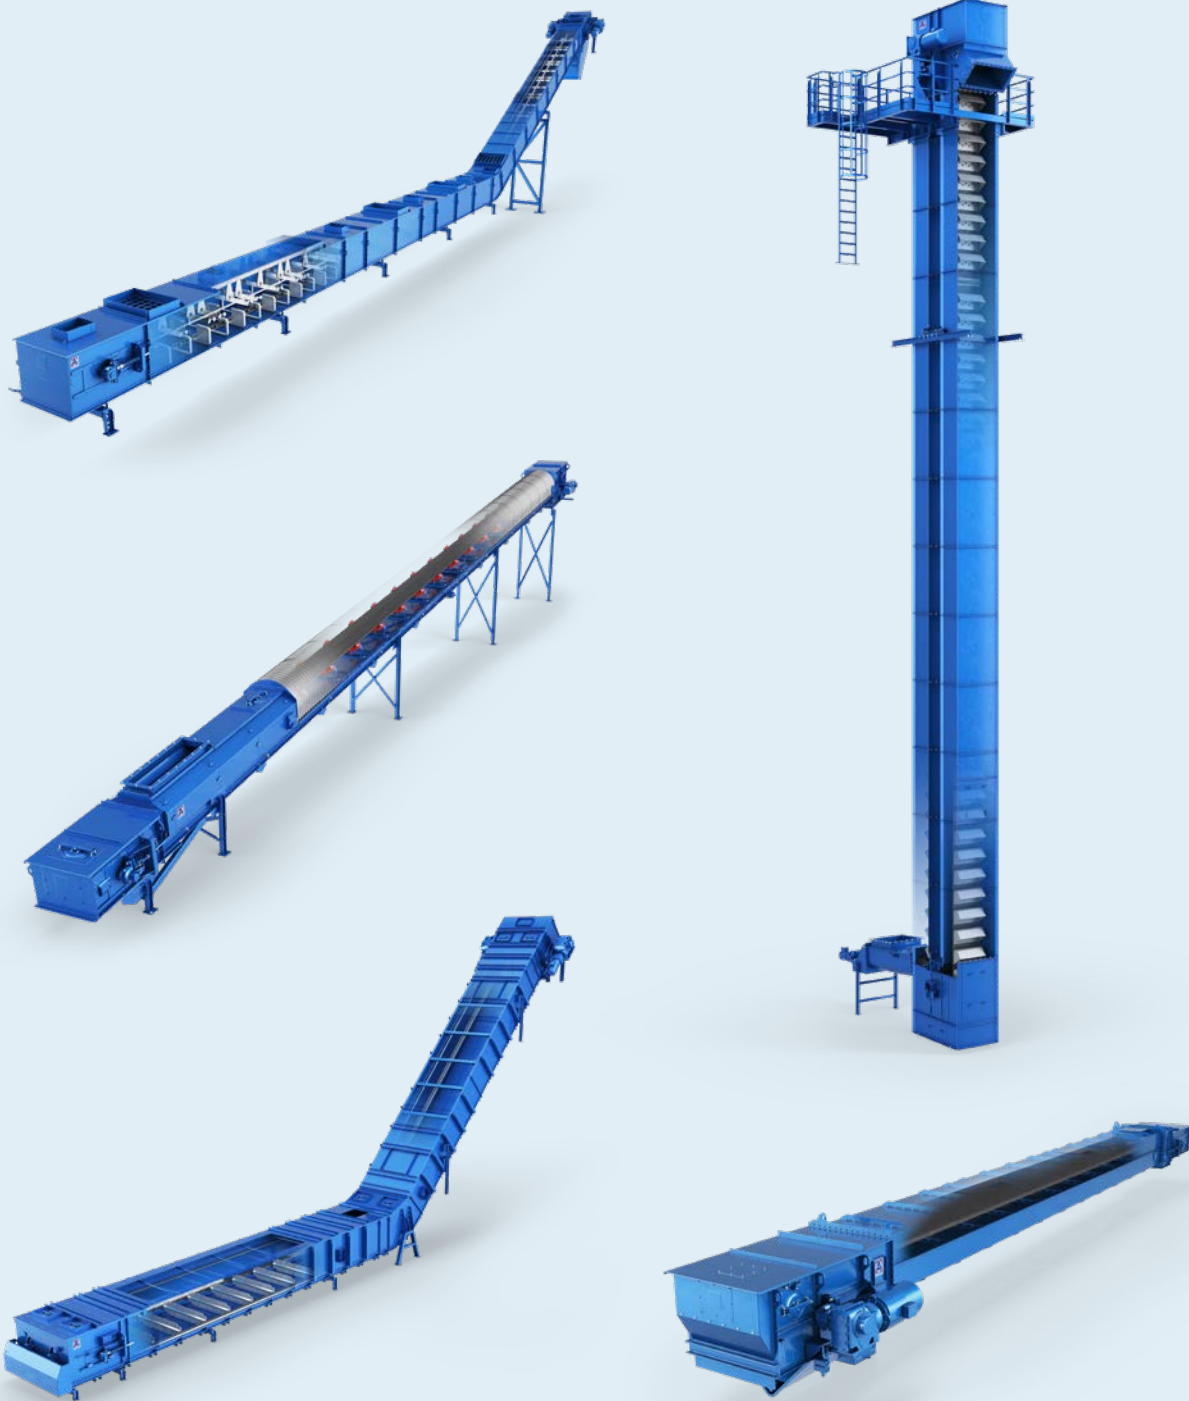

Please feel free to contact us.



AMF-Brunns GmbH & Co. KG · Hauptstraße 101 · 26689 Apen · Germany
 Phone: +49 (0)44 89 - 72 7100 · info@amf-bruns.de
 www.amf-bruns.com